



EASY HEAT

> MULTIFUNCTIONAL

Our middle frequency Easyheat series are designed to be as flexible as needed. One single device for both mounting and dismounting.

> SPACE-EFFICIENT

We have created the Easyheat series with the modern-day shop floor in mind, resulting in movable induction heaters with a minimal equipment footprint.

> TAILOR-MADE

Every workshop and task is different and your application may be highly specific, with Easyheat we can provide you a perfect fit for your situation.

TM
INDUCTION HEATING



EASYHEAT 305

Active Power	3.5 kW
Facility Power	110 - 230 V / 8.6 A / 50/60 Hz
Temperature Control	Single
Dimensions (LxBxH)	250 x 140 x 230 mm / 9.8 x 5.5 x 9 inches
Weight	5 kg / 11 lb



EASYHEAT 355

Active Power	6 kW
Facility Power	110 - 230 V / 16 A / 50/60 Hz
Temperature Control	Single
Dimensions (LxBxH)	240 x 362 x 320 mm / 9.5 x 14.25 x 12.6 inches
Weight	15 kg / 33 lb



EASYHEAT 505

Active Power	13.5 kW
Facility Power	400 - 480 V / 20 A / 50/60 Hz
Temperature Control	Single / Dual
Dimensions (LxBxH)	640 x 500 x 730 mm / 25.2 x 19.7 x 28.7 inches
Weight	110 kg / 242 lb



EASYHEAT 555

Active Power	22 kW
Facility Power	400 - 480 V / 32 A / 50/60 Hz
Temperature Control	Single / Dual
Dimensions (LxBxH)	640 x 500 x 730 mm / 25.2 x 19.7 x 28.7 inches
Weight	110 kg / 242 lb



EASYHEAT 595

Active Power	44 kW
Facility Power	400 - 480 V / 63 A / 50/60 Hz
Temperature Control	Single / Dual
Dimensions (LxBxH)	800 x 600 x 830 mm / 31.5 x 23.6 x 32.7 inches
Weight	185 kg / 408 lb



EASYHEAT 755

Active Power	128 kW
Facility Power	400 - 480 V / 187 A / 50/60 Hz
Temperature Control	Single / Dual
Dimensions (LxBxH)	800 x 600 x 2100 mm / 31.5 x 23.6 x 82.7 inches
Weight	350 kg / 772 lb



EASYHEAT 795



Active Power	170 kW
Facility Power	400 - 480 V / 250 A / 50/60 Hz
Temperature Control	Single / Dual
Dimensions (LxBxH)	800 x 600 x 2100 mm / 31.5 x 23.6 x 82.7 inches
Weight	350 kg / 772 lb

ACCESSORIES



Watercooled Flexible Inductor



Remote Control (505 and up)



Flexible Inductor max. 180°C



Flexible Inductor max. 300°C



Flexible Inductor max. 500°C

FEATURES



REAL-TIME FEEDBACK

Our Easyheat series are more transparent than ever before. The touchscreen interface (equipped with multiple languages) provides clear feedback during heating cycles.



DUAL SENSOR


Heat your parts smarter! Assuring you with a heating cycle as accurate and safe as possible, the majority of our heaters come equipped with a dual sensor temperature measurement.






HEATING CYCLE GRAPHS

Follow your heating cycles closely by using the new cycle graph. After a heating cycle is completed, the data can be exported via the integrated USB connection.

APPLICATIONS

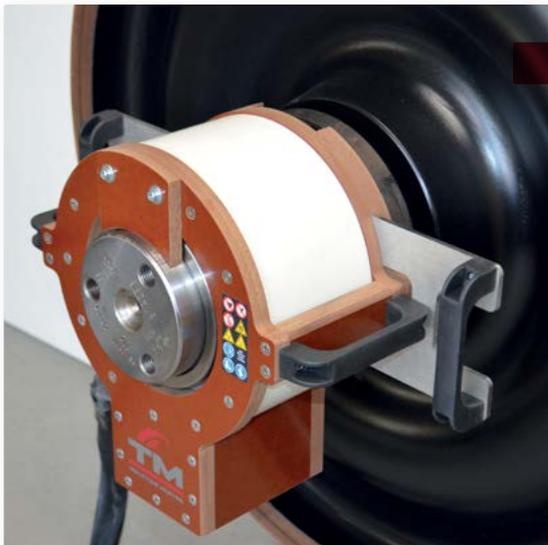

AIRCOOLED

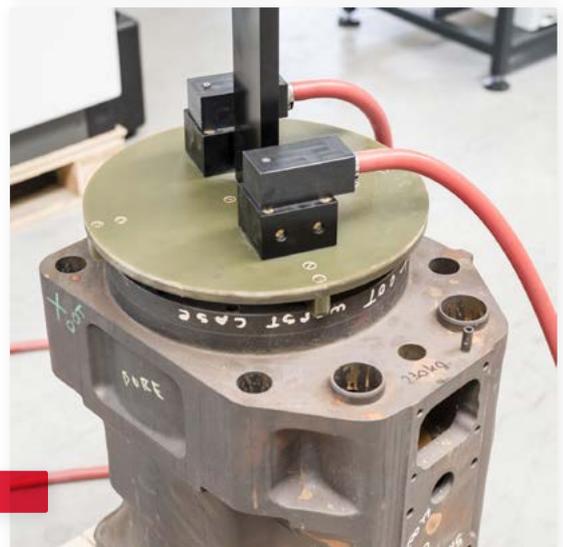

WATERCOOLED

NL / EUROPE

TEL (0031) 341 - 434454
EMAIL info@tminductionheating.com
WEB tminductionheating.com

USA

TEL (720) 266 - 4403
EMAIL info@tminductionheating-us.com
WEB tminductionheating-us.com

